




BHM-79

INSTRUCTION MANUAL

1,Product overview

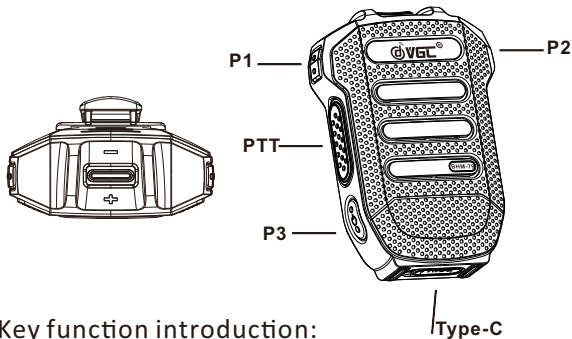

Key function introduction:

1,+ - Key

Short Press: Increase or decrease Channel

Long Press: Continuously increase/decrease channels

Double Click : When the Bluetooth speaker is playing music, switch between the previous song and the next song.

2,P1 Key

Short Press: Decrease Volume

Long Press: A/B Band Switch

Double Click : Mute/ Unlock Mute

3,P2 Key

Short Press: Increase Volume

Long Press : Talk Around ON/OFF

Press P1+P2 : Send 1750Hz Burst Tone

4,P3 Key

Short Press:Report Current Channel


Long Press: Turn On /OFF

Double Click : Enter Pair Status

When the speaker microphone is connected to the Bluetooth system of the mobile phone and a call comes in, Short Press the P3 button to answer the call, and Double-Click the P3 button to hang up the call. When you are on a call, Short Press the P3 button to hang up the call.

Please NOTE that this speaker microphone is not an official headset for calls, so when you answer the call, the call sound quality will be poor. Try to use your mobile phone to answer the call.

2,Remove belt clip



Lift the buckle and push down to remove the belt clip

3,LED Status

Status	Red	Green
Device not connected	flash slowly	
Low voltage alarm	flash quickly	
Enter pairing state	flash alternately	flash alternately
After successful pairing		double flash
disconnect to device	double flash	
mute state		color gradient
Radio TX status	Always on	
Radio RX status		Always on
Charging status	Always on	
Fully charged state		Always on

4,Pair To The Radio

1, Long press the <p3> key to turn on the microphone, then double click the <p3> key to enter pairing state. the indicator light of the microphone flashes red and blue alternately, and a beep sounds to indicate that it has entered the pairing state

2, Turn on the radio, switch the menu to General Settings-Bluetooth Settings on radios. Select Pairing to enter

pairing state.

3, BHM-79 will be displayed in the list of available devices on radios, select BHM-79 and bind it

5, Pair On The APP

1, Press and hold the <P3> button to turn on the microphone to be paired, and then double-click the <P3> button. The indicator light of the microphone flashes red and blue alternately, and a beep sounds to indicate that it has entered the pairing state.

2, Open the APP to enter the settings page, click Connection Management, and turn on scanning.

3, Find the BHM-79 in the scanned list and click BHM-79 to pair.

If pairing is unsuccessful, please repeat the above steps, or the speaker microphone has been mistakenly paired to surrounding radios, please turn off other radio and pair with this device again.

When the pairing is successful, <Peripheral Pairing> will automatically turn off the pairing state. Observe whether the headset icon is displayed on the display of the radio, or press the PTT button.

The display will display the upward transmitting icon. After releasing the PTT, the microphone will make a "beep" sound tone.

6,Upgrade Steps

- 1,Open the **Bluetooth page of the cell phone** and connect the speaker microphone BHM-79 (as shown in the figure 1 below)
2. Open the APP and press the PTT of BHM-79,Click the three dots in the upper right corner to enter the BHM-79 settings page (Figure 2)




Figure 1




Figure 2

3. Pop up the upgrade menu to upgrade

Precautions:

1. The effective communication distance of speaker microphones is less than 10 meters. Use beyond the range will cause the speaker microphone to transmit and receive abnormally.
2. After the wireless microphone is turned on, it will automatically search for the last paired radio. When the paired radio fails to connect, the wireless microphone will automatically turn off after 3 Minutes to save power. If the connection is normal, it will prompt that it is connected and can be used. During use, the paired radio goes offline, and the speaker microphone prompts that the connection has been disconnected.
3. When the speaker microphone prompts that the battery is low, please charge the speaker microphone in time. Continued use will cause the speaker microphone voltage to be lower than the protection value and shut down. While charging, the indicator light shows red and turns blue when fully charged.

Specifications

Model: BHM-79 Wireless Speaker Microphone

TX&RX frequency: 2.4~2.485GHz ISM band

Effective distance: <10 meters

Power supply mode: built-in 1200mA lithium battery

Voltage : 3.7V(Use a 5V@1A rated output power
adapter to charge)

Weight: 115g

Size: 98.5(L)x69.5(W)x30(D)