


Rating	12V DC 10A Max
Insulation Resistance	DC 500V 100MΩ Min
Voltage Breakdown	AC 1000V 1minute
Operating temperature	0°~60°c
Temperature Rise ON Tip	Temperature Rise on Tip Within 60°C AT 13.6VDC 10A After 8 Hours

***MATERIAL**

Housing:PBT4130(UL94V-0).
 Top contact:nickel plated metal.
 Spring contact:nickel plated spring steel.

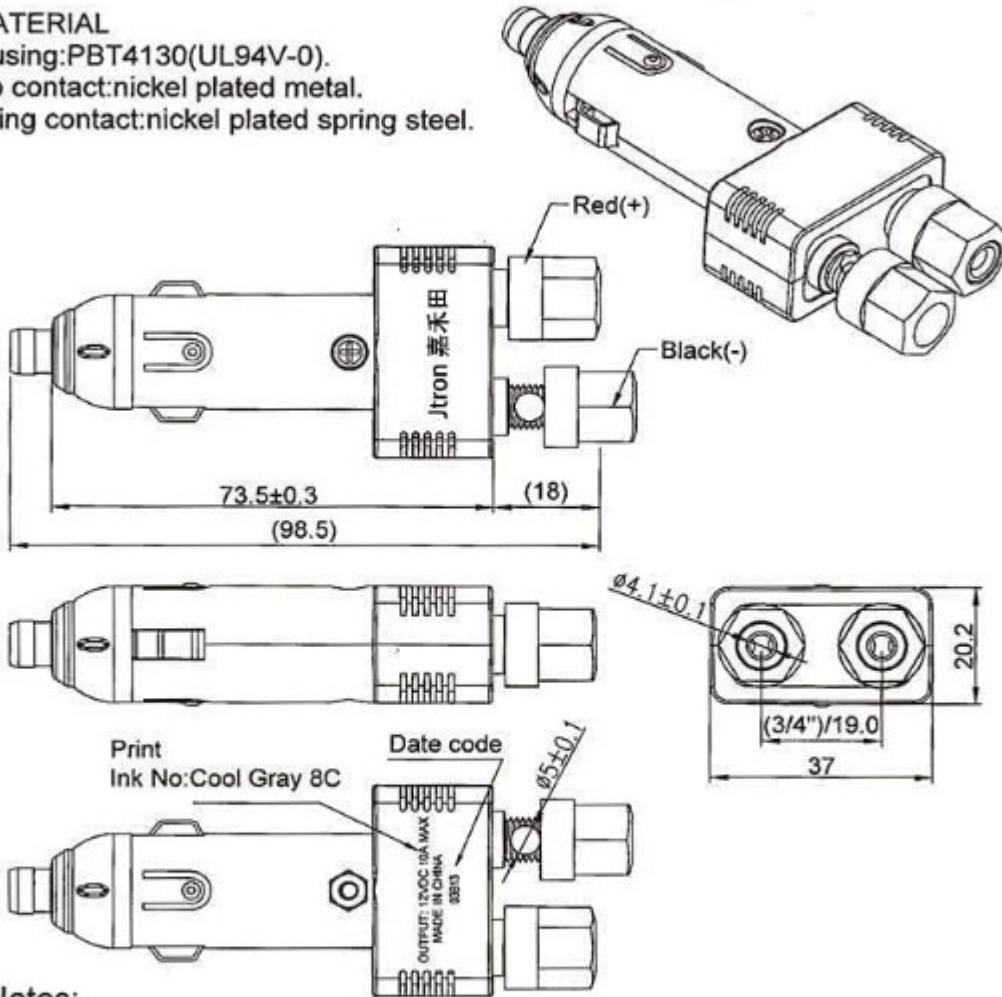

Notes:
 Tolerance is ±0.3mm(0.0118") unless otherwise noted.

Date	Name	Descriptions				NO
Drawn	Checked	Approved	SCI BOM No.	Model Name	CAR POWER PLUG	
		<i>Smiau</i>	Customer No.	Model No.	01011025	REV.
05/20/14		<i>5/22/14</i>	Unit	mm	Shenzhen Jiahietian Technology Co., Ltd.	0