



Datasheet

Model **LiFePO4 12.8V 18.000mAh**

Daniel Beck
Mergenthalerallee 77
65760 Eschborn

Doc. Version 1.3
01.01.2021

For any questions: Please contact us.

info@theeremit.de
01602614589
www.theeremit.de

EREMIT is a registered trademark in Germany.

This specification is applied to describe the related battery product in this Specification and the battery/cell supplied by EREMIT.

All cells within this pack are originally produced by Bixell Technology limited. For further informations related to this product please contact us first.

Page 1: Main information
Page 2-3: Cell Characteristics
Page 4: Protection board Data
Page 5: Charge/Discharge notes; Cell Parts
Page 6: Cell Handling
Page 7: Warranty

Number	Description	Ratings	Remarks
1;	Nominal Capacity	18000mAh	At 0,2C CC discharge
2;	Minimal capacity	>18000mAh	
3;	Nominal Voltage	12.8V	
4;	Delivery voltage	12.4 V	On delivery
5;	Charge voltage	14.6V	
6;	Standard Charging	0.2C Standart	6 hour nominal
		1C max.	1.5 hour rapid
7;	Standard discharging	1C CC to 8.0V	18A standard
		3C max.	54A max.
		5C Pulse	Pulse below 1 second. Higher pulse cause the protection to switch off

8;	Pack internal impedance	≤23mOhm	Measured at 1khz after 50% Charge
9;	Operating temperature	0-45°C	Maximum -10° - 60°C
		Recommended	10 - 34°C
10;	Internal Chemical charact.	IFR	Lithium-Iron-Phosphate

10; Long time storage (-5°C – 30°C)


If the battery need be stored for a long time, the voltage should be 13.2V, and stored in the condition as storage proposal. It need at least one charge & discharge cycle every year.

Maximum sizes: 133 x 100 x 84 mm

Maximum weight: 1.9 kilogram


Battery Characteristics

Number	Description	Ratings	Remarks
1;	Standard Charge	Charging cell initially with constant current at 0.2C to 14.6V, then with constant voltage at 14.6V till charge current is below 0.02C	
2;	Rated capacity	Capacity means the discharge capacity of the cell, which is measured with discharge current of 0.2C with 9.0V cut-off voltage after standard charge.	18000mAh
3;	Cycle life	Test condition: Charge 1C to 14.6V -> discharge 1C to 8.0V 80% or more of 1 st cycle capacity at 0.5C discharge of operation	>2000
4;	Self discharge	After standard charging stored 1 month under storage condition described in page 2; then measured the capacity with 0.2C till 9.0V	Above 98% residual capacity

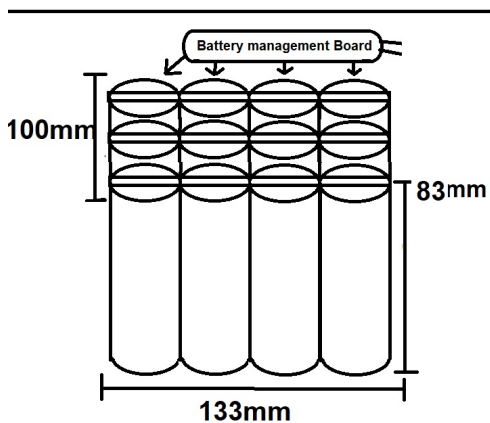


Protection circuit Data

Item	Symbol	Content	Criterion
Over charge Protection	V_{DET1}	Over charge detection voltage	$3.75 \pm 0.05V$
	tV_{DET1}	Over charge detection delay time	$0.015 \sim 0.14s$
	V_{REL1}	Over charge release voltage	$3.55 \pm 0.05V$
Over discharge protection	V_{DET2}	Over discharge detection voltage	$2.2 \pm 0.1V$
	tV_{DET2}	Over discharge detection delay time	$95 \sim 173ms$
	V_{REL2}	Over discharge release voltage	$2.5 \pm 0.10V$
Over current protection	V_{DET3}	Over current detection voltage	N/A
	I_{DP}	Over current detection current	100A
	tV_{DET3}	Detection delay time	1~10s
		Release condition	Cut load
Short protection		Detection condition	Exterior short circuit
	T_{SHORT}	Detection delay time	50 μs
		Release condition	Cut short circuit
Interior resistance	R_{DS}	Main loop electrify resistance	$V_C=3.8V$; $R_{DS} \leq 16m\Omega$
Current consumption	I_{DD}	Current consume in normal operation for full board	25 μA Type 50 μA Max

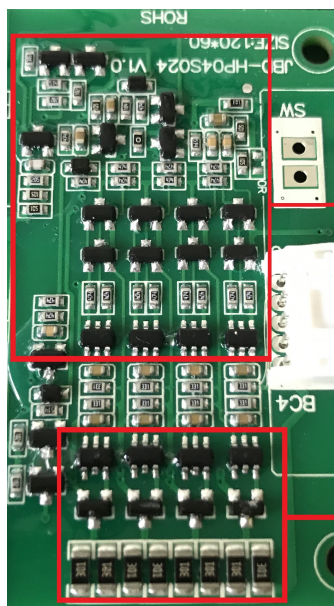

Protection circuit

Balancer Bank
Switch on: >3.55V
Balancer Current: 30mA max.

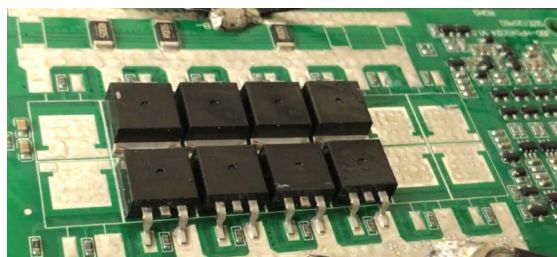

2x 4x KIA2803A Mosfet
160A max. Current

Over-Discharge

Short time over discharge does not affect the battery function, but long time over discharges can damage battery performance, and can't use any more. due to its own self-discharge characteristics also lead to over-discharge, to prevent over-discharge occurs, the battery should maintain the certain electric quantity, the cell shall be charged periodically to maintain between 3.0V and 3.65V – in total the pack shall be charged to between 12.0V and 14.6V. Over-discharging may causes loss of cell performance, characteristics, or battery functions. The electrical products shall be equipped with a device to prevent further discharging exceeding a cut-off voltage specified in the Product Specification.

If Cells below 2.0V

The cell battery pack shall start with a low current (0.02C) for 30 - 45minutes, i.e. pre-charging, before rapid charging starts. The rapid charging shall be started after the (individual) cell voltage has been reached above 2.5V (10V in total) within 30 - 45 minutes that can be determined with the use of an appropriate timer for pre-charging. In case the (individual) cell voltage does not rise to 2.5V (10V in total) within the pre-charging time, then the charger shall have functions to stop further charging and display the cell/pack is at abnormal state.


Charging

Charging current: Do not surpass the largest charging current that specification stipulated.

Charging voltage: Do not surpass the highest limited voltage that specification stipulated.

Charging temperature: within temperature scope that specification stipulated.

Charge with constant current, then with the constant voltage, no reverse charge, which is dangerous

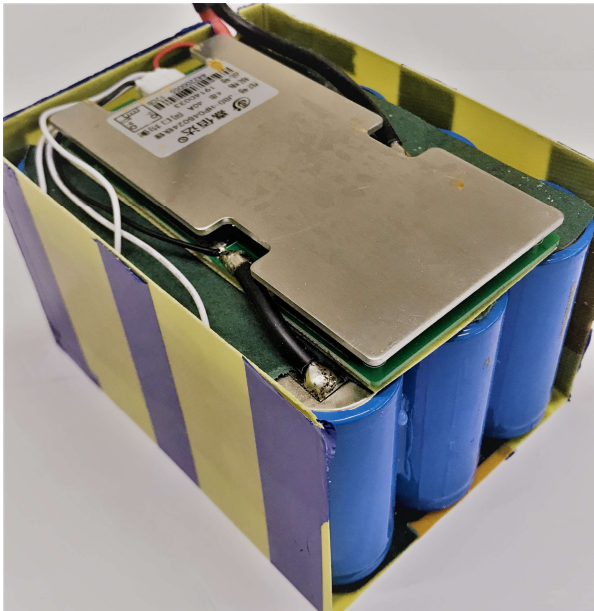

No.	Part Name	Description	Q'ty	Remark
1	Cell/Pack	LiFePo4-12.8V-18000mAh	1	
2	Patterns Tape	Shrink tube, Fibreboard Boxing	1	
3	PCM	JBD-HP045024 8x kia2803A	1	
4	Wire	AWG12	2	

12. Handling of Cells

12. Warning and cautions in handling the lithium cell

To prevent the possibility of the cell from leaking, heating, explosion, please observe the following precautions:

1. ☞ Don't immerse the cell in water.
2. ☞ Don't use and leave the cell near a heat source, such as fire or heater.
3. ☞ Don't reverse the positive and negative terminals.
4. ☞ Don't connect the cell to an electrical outlet directly.
5. ☞ Don't discard the cell in fire or heater.
6. ☞ Don't connect the positive and negative terminal directly with metal objects.
7. ☞ Don't transport and store the cell together with metal objects such as necklaces, hairpins.
8. ☞ Don't strike, throw or trample the cell.
9. ☞ Don't directly solder the cell.
10. ☞ Don't pierce the cell with a nail or other sharp object.

- ☞ **Caution**

- ☞ If the cell leaks and the electrolyte get into your eyes, don't wipe eyes, instead, thoroughly rinse the eyes with clean running water for at least 15 minutes, and immediately seek medical attention. Otherwise, eye injury can result.
- ☞ If the cell gives off an odor, generates heat, becomes discolored or deformed, or in any way appears abnormal during usage, recharging or storage, immediately remove it from the device or cell charger and stop using it.

Period of Warranty

The period of warranty is 2 year from the date of shipment. Replacement is guaranteed within warranty if battery with defects proven due to manufacturing process instead of the customer's abuse and misuse.

For further warranty regulations please check country-specific regulations made by eremit.